


MARINE GENERATOR SPECIFICATIONS

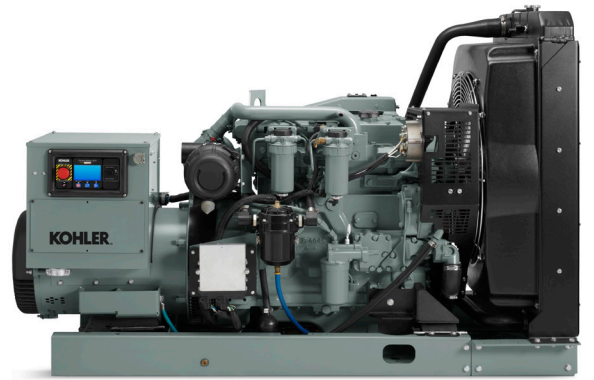

KOHLER[®]
IN POWER. SINCE 1920.

Generator Model*	kW†	Hz	Cylinder	RPM	Phase	Voltage	Amps	Length x Width x Height mm (in)		Weight (Wet) kg (lb)	
								U – Unhoused / R – Radiator			
40EOZCJ	40	60	4	1800	3	120 / 208	139	U – 1524 (60) x 722 (28.4) x 960 (37.8) R – 1858 (73.2) x 827 (32.6) x 1265 (49.8)	U – 935 (2060) R – 957 (2110)†		
						120 / 240	120				
						120 / 240	150				
						127 / 220	131				
						139 / 240	120				
						277 / 480	60				
33EFOZCJ	33	50	4	1500	3	110 / 190	125				
						110 / 220	108				
						115 / 230	143				
						220 / 380	63				
						230 / 400	60				
						240 / 416	57				
40EFOZCJ	40	50	4	1500	3	110 / 190	152	U – 1549 (60.9) x 738 (29) x 961 (37.8) R – 1884 (74.2) x 827 (32.5) x 1265 (49.8)	U – 971 (2140) R – 993 (2190)†		
						110 / 220	131				
						115 / 230	174				
						220 / 380	76				
						230 / 400	72				
						240 / 416	69				
50EFOZCJ	50	50	4	1500	3	110 / 190	190			U – 1606 (63.2) x 738 (29) x 961 (37.8) R – 1941 (76.4) x 827 (32.5) x 1265 (49.8)	U – 1005 (2216) R – 1028 (2266)†
						110 / 220	164				
						115 / 230	196				
						220 / 380	95				
						230 / 400	90				
						240 / 416	87				
55EOZCJ	55	60	4	1800	3	120 / 208	191	U – 1549 (60.9) x 738 (29) x 961 (37.8) R – 1884 (74.2) x 827 (32.5) x 1265 (49.8)	U – 982 (2164) R – 1004 (2214)†		
						120 / 240	165				
						120 / 240	221				
						127 / 220	180				
						139 / 240	165				
						277 / 480	83				
45EFOZCJ	45	50	4	1500	3	110 / 190	171			U – 1606 (63.2) x 738 (29) x 961 (37.8) R – 1941 (76.4) x 827 (32.5) x 1265 (49.8)	U – 1005 (2216) R – 1028 (2266)†
						110 / 220	148				
						115 / 230	196				
						220 / 380	86				
						230 / 400	79				
						240 / 416	71				
65EOZCJ	65	60	4	1800	3	120 / 208	226	U – 1606 (63.2) x 738 (29) x 961 (37.8) R – 1941 (76.4) x 827 (32.5) x 1265 (49.8)	U – 1016 (2240) R – 1039 (2290)†		
						120 / 240	195				
						120 / 240	221				
						127 / 220	213				
						139 / 240	195				
						277 / 480	98				
55EFOZCJ	55	50	4	1500	3	110 / 190	209			U – 1606 (63.2) x 738 (29) x 961 (37.8) R – 1941 (76.4) x 827 (32.5) x 1265 (49.8)	U – 1016 (2240) R – 1039 (2290)†
						110 / 220	181				
						115 / 230	217				
						220 / 380	105				
						230 / 400	95				
						240 / 416	89				
80EOZCJ	80	60	4	1800	3	120 / 208	278	U – 1657 (65.2) x 753 (29.6) x 999 (39.3) R – 1992 (78.4) x 890 (35) x 1277 (50.3)	U – 1148 (2530) R – 1179 (2600)†		
						120 / 240	241				
						127 / 220	262				
						139 / 240	241				
						277 / 480	120				
						110 / 190	266				
70EFOZCJ	70	50	4	1500	3	110 / 220	230			U – 1657 (65.2) x 753 (29.6) x 999 (39.3) R – 1992 (78.4) x 890 (35) x 1277 (50.3)	U – 1148 (2530) R – 1179 (2600)†
						220 / 380	133				
						230 / 400	126				
						240 / 416	121				
						120 / 208	343				
						120 / 240	298				
99EOZCJ	99	60	4	1800	3	127 / 220	325	U – 1732 (68.2) x 753 (29.6) x 999 (39.3) R – 2067 (81.3) x 890 (35) x 1277 (50.3)	U – 1243 (2740) R – 1275 (2810)†		
						139 / 240	298				
						277 / 480	149				
						110 / 190	304				
						110 / 220	262				
						220 / 380	152				
80EFOZCJ	80	50	4	1500	3	230 / 400	144			U – 1732 (68.2) x 753 (29.6) x 999 (39.3) R – 2067 (81.3) x 890 (35) x 1277 (50.3)	U – 1243 (2740) R – 1275 (2810)†
						240 / 416	139				
						120 / 208	434				
						120 / 240	376				
						127 / 220	410				
						139 / 240	376				
125EOZCJ	125	60	6	1800	3	277 / 480	188	U – 2068 (81.4) x 893 (35.2) x 1003 (39.5) R – 2466 (97.1) x 1129 (44.5) x 1275 (50.2)	U – 1515 (3340) R – 1578 (3478)†		
						110 / 190	380				
						120 / 208	347				
						110 / 220	328				
						220 / 380	190				
						230 / 400	180				
100EFOZCJ	100	50	6	1500	3	240 / 416	173			U – 2068 (81.4) x 893 (35.2) x 1003 (39.5) R – 2466 (97.1) x 1129 (44.5) x 1275 (50.2)	U – 1515 (3340) R – 1578 (3478)†
						120 / 208	520				
						120 / 240	451				
						127 / 220	492				
						139 / 240	451				
						277 / 480	226				
150EOZCJ	150	60	6	1800	3	110 / 190	474	U – 2091 (82.3) x 893 (35.2) x 1003 (39.5) R – 2498 (98) x 1129 (44.5) x 1275 (50.2)	U – 1551 (3419) R – 1613 (3557)†		
						120 / 208	433				
						110 / 220	409				
						220 / 380	237				
						230 / 400	225				
						240 / 416	217				
125EFOZCJ	125	50	6	1500	3	120 / 208	695			U – 2091 (82.3) x 893 (35.2) x 1003 (39.5) R – 2498 (98) x 1129 (44.5) x 1275 (50.2)	U – 1551 (3419) R – 1613 (3557)†
						120 / 240	602				
						127 / 220	657				
						139 / 240	602				
						277 / 480	301				
						110 / 190	666				
200EOZCJ	200	60	6	1800	3	110 / 220	575	U – 2490 (98) x 970 (38.2) x 1086 (42.8)	U – 2067 (4558)		
						220 / 380	333				
						230 / 400	316				
						240 / 416	304				
						120 / 208	695				
						120 / 240	602				
175EFOZCJ	175	50	6	1500	3	127 / 220	657			U – 2490 (98) x 970 (38.2) x 1086 (42.8)	U – 2067 (4558)
						139 / 240	602				
						277 / 480	301				
						110 / 190	666				
						110 / 220	575				
						220 / 380	333				

*Commercial models are unhoused. †kW rating varies by voltage. Consult the generator spec sheet for more detail.

AMERICAS/CARIBBEAN
920-565-3381
800-544-2444
Fax 920-459-1646

CHINA
+86 21 26062169
+86 400 1808 900

**EUROPE
MIDDLE EAST
AFRICA**
+31 168 331630

ASIA-PACIFIC
+65 6264 6422
Fax +65 6264 6455

INDIA
+91 80 42867000
+91 80 23615972

**NEW ZEALAND
AUSTRALIA**
+61 88 29 02100

KOHLERPOWER.COM